
S U P P L Y I N G C L E A N A I R T O I N D U S T R Y

MODEL M33 R&L Media Air Cleaner



The M33 is a self-contained media air cleaning system designed for general background or ducted for source capture applications. The M33 can be ordered with three-stage filtration which will effectively remove a broad range of airborne contaminants including fine dusts, smoke, soot, vapors, mist, VOC's and more at a rate of up to 1500 cfm.



For further information:

[Click for Op Manual](#)

BERRIMAN ASSOCIATES
1-800-480-3630
www.berriman.com

M33 R&L FEATURES & SPECIFICATIONS

DIMENSIONS: 27 1/2" H x 14 1/2" W x 56" L
WEIGHT: 200 lbs. installed
 240 lbs. shipping weight
CABINET: 16 gauge welded steel cabinet with a baked enamel, textured coated finish.
POWER INPUT: 110 - 120 Vac, 60 hz, 1 phase, 12 amps
 208-240 Vac, 60 hz, 1 phase, 6 amps
PRIMARY FILTER: Dimensions on the bag filters are 12" x 24" x 26"
AIRFLOW/EFFICIENCY:

Stock #	Filter*	CFM = Cubic Feet Per Minute	
		1 HP	WG
41128	95-98% Bag	1125 CFM	1.3
41129	85-90% Bag	1250 CFM	1.1
41130	65-70% Bag	1270 CFM	1.0
41131	45-50% Bag	1315 CFM	1.0

*Efficiency based on ASHRAE Dust Spot 52-76.

AMBIENT TEMPERATURE: 175° maximum.
MOUNTING: Standing or hanging cabinet with horizontal airflow. Ceiling mount brackets – standard.
PREFILTER: 30-35% efficiency, pleated 12" x 24" x 4". Filter media is a cotton and synthetic blend. Total prefilter media area is 15 sq. ft.
MOTOR: 1 HP sealed ball bearings and thermally protected. Adjustable motor sheave allows for field adjustments to the rated air flow.
BLOWER: Forward curved, ball bearing, belt driven centrifugal blower. This blower is capable of moving 2250 cfm free air.
INSTRUMENTATION: **Dirty Filter Gage** – Factory installed pressure gage designed to determine filter replacement cycle.
Indicator Light – Light indicates that the blower motor is energized properly.
FILTER ACCESS: Side load track system with hinged access door.
SOUND LEVELS: 72 dBa at 9', 70 dBa at 12'.

STANDARD FEATURES:

- 36 month parts warranty.
- One HP maintenance-free motor.
- Dirty filter gage.
- 35% efficient 4" pleated prefilter.
- 10' power cord with molded plug.


OPTIONAL EQUIPMENT:

- Impinger assembly for mist applications.
- Plenum, ducting and hood accessories.
- 2 HP motor upgrade.
- Extended service filter upgrade.
- 65% ASHRAE prefilter.
- Minihelic® upgrade
- Bulk refillable carbon module

M33L SHOWN WITH OPTIONAL PLENUM



M33L SHOWN WITH OPTIONAL 22 LB. CARBON MODULE & E.S.F. FILTER

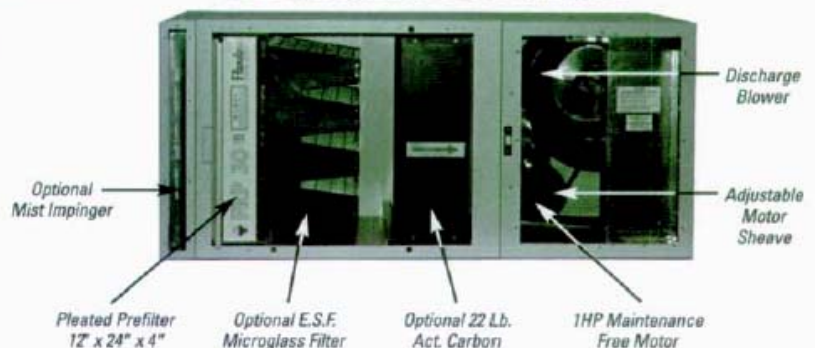

For further information:

BERRIMAN ASSOCIATES
 1-800-480-3630
 www.berriman.com

Manufacturer has a policy of continuing product improvement and reserves the right to make changes in design and specification without notice.

PN51621 11/02